

MMCX SERIES

50Ω MMCX MICRO-MINI JACKS & PLUGS

Mates with:
RF174, RF316, RF178,
GRF1H-C

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?MMCX-EM, www.samtec.com?MMCX-MT, www.samtec.com?MMCX-SM or www.samtec.com?MMCX-TH

Contact Material:

BeCu

Insulator Material:

PTFE

Pin and Shell Material:

Brass

Operating Temp Range:

-65°C to +125°C

Insulation Resistance:

1000MΩ min

Contact Resistance:

Center: 5mΩ

Outer: 2.5mΩ

Impedance:

50Ω

Dielectric Withstanding Voltage:

500 Vrms, 50Hz

Dielectric Working Voltage:

170 Vrms, 50Hz

V.S.W.R.:

1.3 max (-EM, -ST-SM1)

1.5 max (-RA-SM1)

Frequency Range:

0-6 GHz



RoHS Compliant:

Yes

Processing:

Lead-Free Solderable

Yes

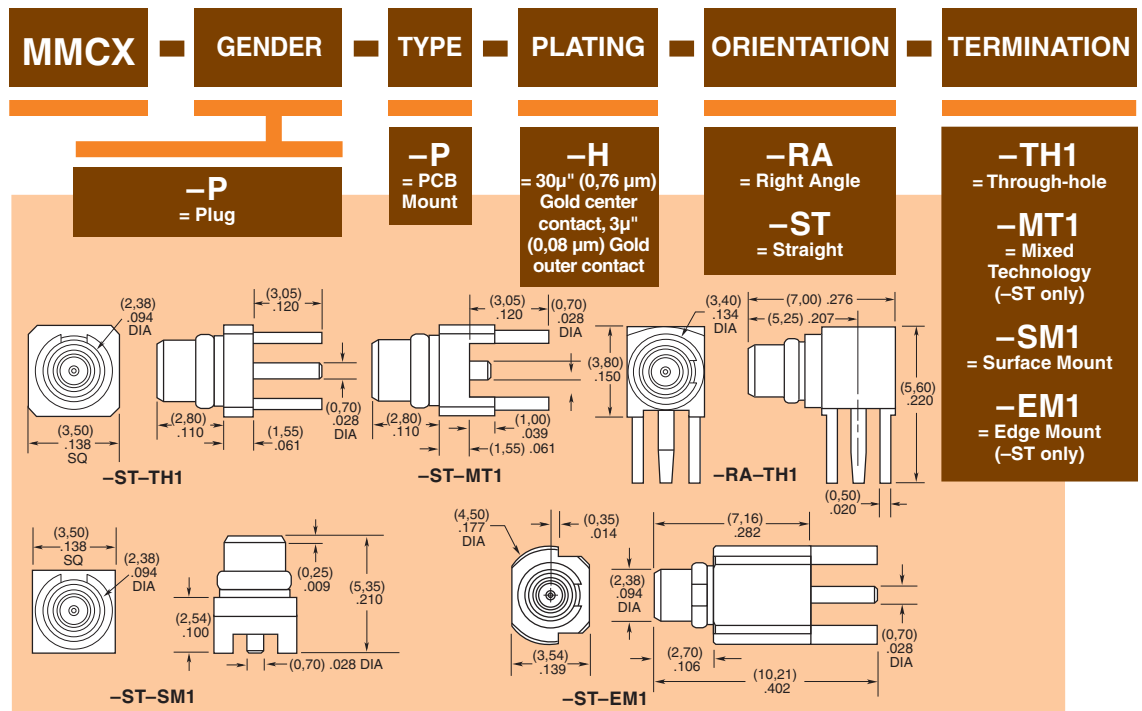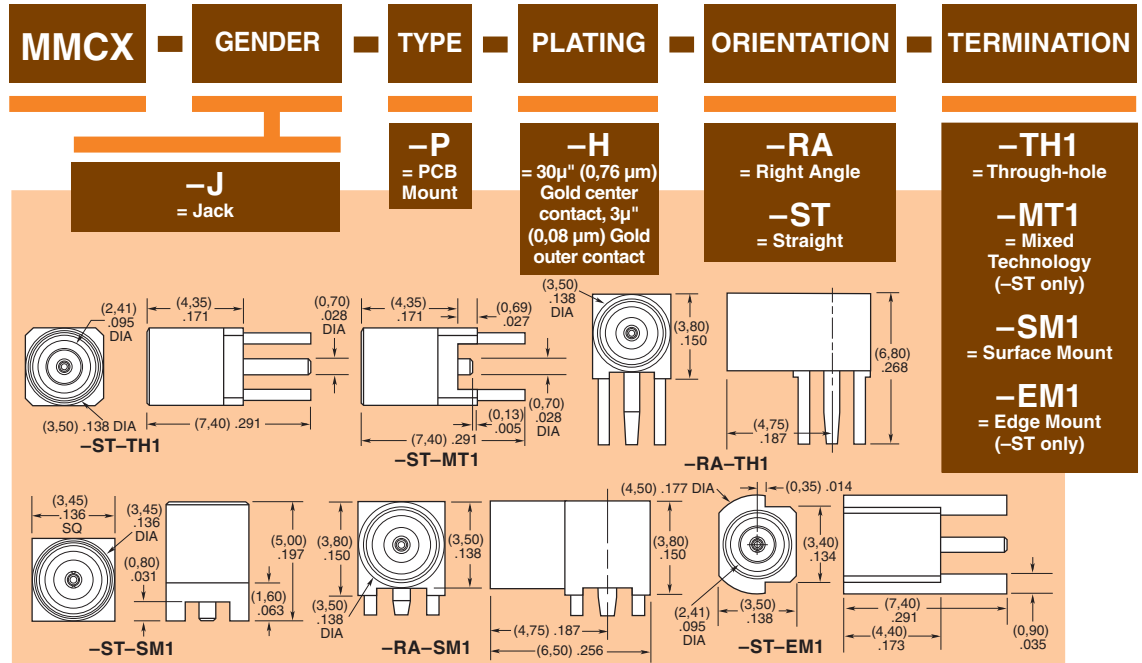

Note: Random vibration and Resonant Search test reports available online.

Note: The MMCX and MMCXV connectors are not inter-mateable.

Note: 75Ω version available. See MMCX7 Series.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM